



PORTABLE REBAR CUTTERS & BENDERS

Hoppt provides top-of-the-line portable rebar cutting & bending machines that are high-performance & safety-rated. Our equipment is built to last even in the toughest on site conditions. With high cut speed capabilities and superior quality hydraulics, our rebar cutters & benders range leads the industry.

Hoppt rebar benders are manufactured from industrial-grade materials and provide generous bending capabilities. All products are tested in the most demanding environments and pass international construction standards. Our rebar benders lead the industry in reliability, safety and efficiency.

This Portable Bender is equipped with a Single Phase 220-240V, 50Hz electric motor, with a power input of 850 watts. The net weight of this machine is 15kg and the dimension is 18.9" long x 5.9" wide. The bend speed of this Portable Rebar Bender <5.0 seconds at a bend angle of 0-130 degrees (with standard head).

PORTABLE REBAR CUTTERS

Technical Data			
DESCRIPTION	HRC-16	HRC-20	HRC-25
Dimensions (LxWxH)	460x270x120mm	410x120x220mm	480x150x120mm
Cut diameter	4-16mm-650N/mm'	4-20mm-650N/mm'	4-25mm-650N/mm'
Electric motor	Single Phase-220-240AC-50Hz		
Power Input	900W(220-240V)	1 000W(220-240V)	1550W(220-240V)
Cut Speed	< 2.0 sec	< 2.5 sec	< 3.0 sec
Net Weight	8 kg	13 kg	24 kg

PORTABLE REBAR BENDERS

Technical Data	
DESCRIPTION	HZB-16
Dimensions (LxWxH)	480x150x120mm
Bend Diameter	4-16mm-650N/mm'
Electric Motor	Electric Motor Single Phase-220-240AC-50Hz
Power Input	850W(220-240V)
Bend Speed	< 5.0 sec
Bend Angle	0-130° (with standard head)
Net Weight	15 kg

PORTABLE REBAR CUTTERS & BENDERS




HRC-16



HRC-20



HRC-25

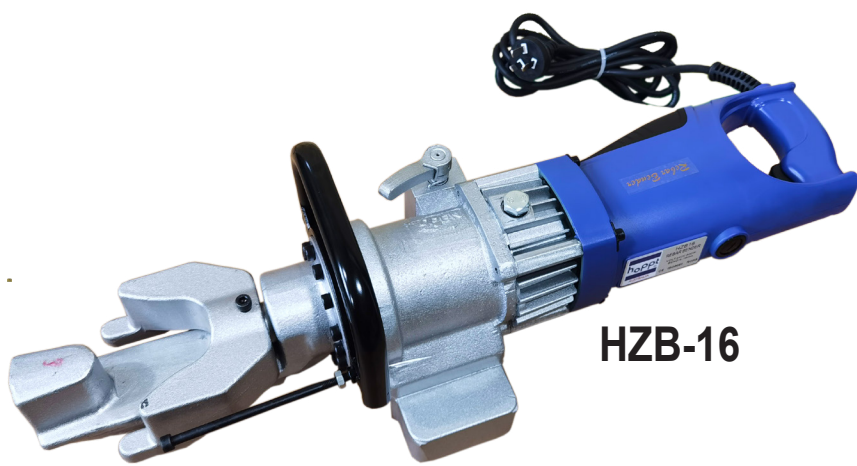

HQB-16

